



## THE PRODUCT

The Shield Embassy Series is forced entry resistant and designed to withstand entry from highly skilled attackers using heavy-duty tools such as sledge hammers, crow bars, wrenches, and wedges.

# Shield Embassy Series

## RIGOROUS TESTING

The Embassy Series was tested at NTS Chesapeake in Belcamp, MD and Intertek in York, PA to the US State Department (DoS) forced entry standard at the 5 minute level (FE 5) and at the iFT Rosenheim laboratory in Germany and was awarded a Security Class 3 (RC 3) rating according to European standard EN1627.

It was also tested for bullet resistance to UL752 level 3 and NIJ level IIIA, and European standard EN1522 level FB4. The door is suitable for private houses, apartments and commercial buildings.



## DIMENSIONS



**Height:**  
up to 110" (depending on decorative panels)

**Width:**  
up to 49" Inswing or outswing

## HARDWARE

### High security

bump and pick resistant  
Mul-T-Lock cylinders



### Drill resistant

cylinder defenders



### Available lock options

Mottura 85 series  
(mechanical) or ISEO



### Lockout function

optional with  
mechanical lock only



*Designed for locations  
at high risk of forced  
entry*


## Shield Security Doors

1-866-639-1507

info@shieldsecuritydoors.com

shieldsecuritydoors.com


## SECURE SIDE

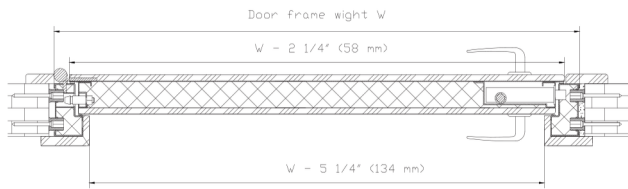


## THREAT SIDE

## SECURE SIDE

## THREAT SIDE

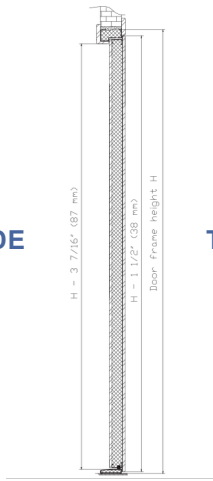

## REQUIRED TOOLS



## FE SD-STD.01.01 REV. G.



OUTSWING TEST



INSWING TEST

## TECHNICAL SPECS

- Door constructed from 16 AWG steel.
- Frame constructed from 12 AWG steel.
- Armored multi-point locking system with up to 16 locking points  $\frac{3}{4}$ "  $\varnothing$ .
- Locks encased in drill resistant manganese.
- UL752 level 3, NIJ level IIIA - optional.
- Door thickness: 3" (75mm).
- Frame thickness: 4" (100mm).
- Welded, adjustable ball bearing security hinges.
- $\frac{1}{2}$ " (12mm) or  $\frac{3}{4}$ " (18mm) thick decorative panels.
- 2" of rock wool for sound and thermal insulation
- Door is pre-hung to the frame.
- L-shaped frame profile that protects locking.
- Frame is secured in the wall using 16 bolts protected by 1" steel shims.
- Inswing or outswing.
- Unlimited design and glass options.

## INSTALLATION FAQ

- The Shield Embassy series comes as a pre-hung door set and includes frame, locks, cylinders, handles, hinges, and hardware.
- It can be installed by any licensed GC or door installer.
- No specialized training or tools required!
- A  $\frac{1}{2}$ " to  $\frac{3}{4}$ " gap is required on all sides between the frame and wall (rough opening).
- The Shield Embassy series frame is designed to adapt to crooked walls and openings.
- For detailed instructions, download our installation manual.



The secret to good security? **Keeping it a secret.**

[www.shieldsecuritydoors.com](http://www.shieldsecuritydoors.com)